


# namal

7043.01 - 7043.42

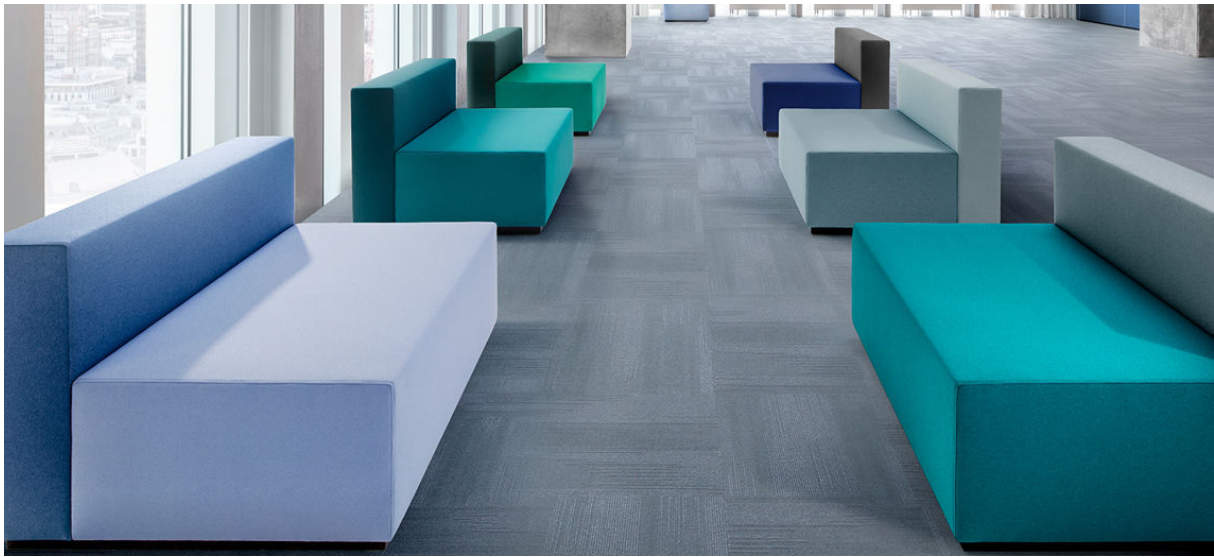

binder

**upholstery 02**

description

**crêpe upholstery fabric**

composition

**100% flame retardant polyester**

width

**± 150 cm, ± 59 inches**

weight

**± 540 gr/m<sup>1</sup>, ± 17 oz/yd<sup>1</sup> fabrics**

flame retardancy

**EN 1021/1-2**

**BS 5852, crib 5**

**NF P 92/503-507, M1**

**DIN 4102, B1**

**UNI 9175, classe 1**

**Cal TB 117-2013**

abrasion

**ISO 12947-2**

25.000 rubs martindale

**ASTM D4157**

100.000 double rubs wyzenbeek

pilling

**ISO 12945-2**

4 (scale 1– 5)

**ASTM D3511**

5 (scale 1– 5)

colorfastness to crocking

**ISO 105-X12**

wet 4-5 / dry 4-5 (scale 1– 5)

**AATC 8**

wet 5 / dry 5 (scale 1– 5)

colorfastness to light

**ISO 105-B02**

4 - 5 (scale 1 – 8)

**AATCC 16.3: 40 hours**

4 (scale 1– 5)

seam slippage

**ISO 13936 - 2**

warp 2 mm / weft 2.8 mm

**ASTM D4034**

warp 52 lbs / weft 51 lbs

breaking strength

**ASTM D5034**

warp 311 lbs / weft 213 lbs

flexibility

**ISO 13937-3**

A

care



# namal

7043.01 - 7043.42

